

Authorized Distributor:

WESCHLER INSTRUMENTS

phone: 800-903-9870 440-378-6580

fax: 800-903-9590 440-238-0660

www.weschler.com info@weschler.com

RE72 TEMPERATURE CONTROLLER


Features




Input



Outputs



Galvanic Isolation



Sifam Tinsley Instrumentation Ltd
Unit 1 Warner Drive,
Springwood Industrial Estate
Braintree, Essex, UK, CM72YV
E-mail: sales@sifamtinsley.com
Web: www.sifamtinsley.com/uk
Contact: +44(0)1803615139




Sifam Tinsley Instrumentation Inc.
3105, Creekside Village Drive,
Suite No. 801, Kennesaw,
Georgia 30144 (USA)
E-mail Id : psk@sifamtinsley.com
Web : www.sifamtinsley.com
Contact No. : +1 404 736 4903



- Universal measuring input.
- Binary input control.
- Set point value: fixed value, programmed or from an additional input.
- On/off, PID, PID step-by-step control (valve control) or PID of heating-cooling type.
- Soft start.
- 8 types of alarms.
- Function of bistable alarm (LATCH).
- Timer function.
- Measurement of heater current and heater burning control or short-circuit of the control element (e.g. SSR).

Example of Application

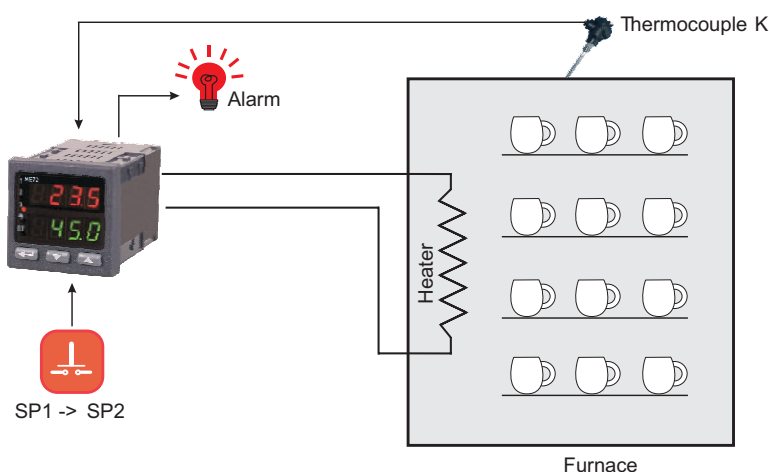

Control of ceramics burning process.

Input

Input type	Range	Error
Pt100	-200 .. 850°C	0.2%
Pt1000	-200 .. 850°C	0.2%
Fe-CuNi (J)	-100 .. 1200°C	0.3%
Cu-CuNi (T)	-100 .. 400°C	0.3%
NiCr-NiAl (K)	-100 .. 1372°C	0.3%
PtRh10-Pt (S)	0 .. 1767°C	0.5%
PtRh13-Pt (R)	0 .. 1767°C	0.5%
PtRh30-PtRh6 (B)	200 .. 1767°C	0.5%
NiCr-CuNi (E)	-100 .. 1000°C	0.3%
NiCrSi-NiSi (N)	-100 .. 1300°C	0.3%
chromel-kopel (L)	-100 .. 800°C	0.3%
Current channels (I)	0/4 .. 20 mA	0.2% +/- 1 digit
Voltage channels (U)	0 .. 5/10 V	0.2% +/- 1 digit

Outputs

Output type	Properties	Load capacity
Voltageless relay output	NO contact	2 A/ 230 V a.c. (out. 1 and 2) 1 A/ 230 V a.c. (out. 3)
Voltage transistor output	0/5 V	max 40 mA
Continuous voltage output	0 .. 10 V	at $R_{load} \geq 1 \text{ k}\Omega$
Continuous current output	0 .. 20 mA, 4 .. 20 mA	at $R_{load} \leq 500 \Omega$

Digital Interface

Interface type	RS-485	Mode
Protocol	Modbus RTU	8N2, 8E1, 8O1, 8N1
Transmission rate	4.8, 9.6, 19.2, 38.4, 57.6 kbit/s	

External Features

Readout field	2 x 4 digits	digit height: 10 mm, red and green colours
Dimensions	48 x 48 x 93 mm	
Weight	< 0.2 kg	
Protection grade	from frontal plate: IP65	from terminal side: IP20

Rated Operating Conditions

Supply voltage	85 .. 253 V a.c./ d.c.	20 .. 40 V a.c./d.c.
Temperature	ambient: 0...23...50°C	storage: -20...70°C
Relative humidity	< 85%	(without condensation of water vapour)
Operating position	any	

Safety and Compatibility Requirements

Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Pollution level		2
Installation category		III
Maximal phase-to-earth operating voltage	supply, output: 300 V	input circuits: 50 V
Altitude above sea level		2000 m

Connection Diagram

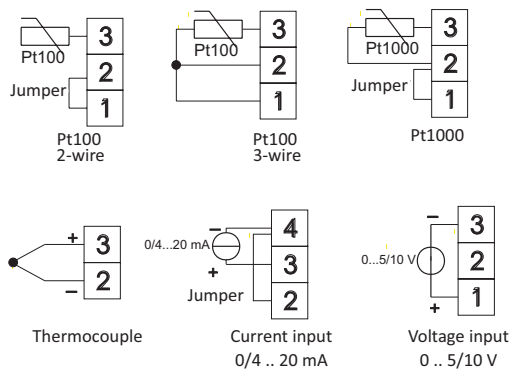


Fig. 1. Input signals.

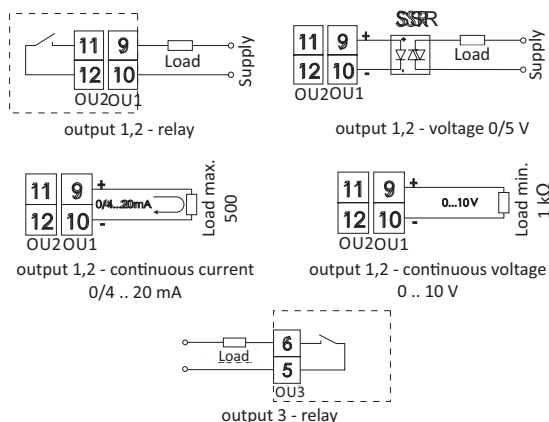


Fig. 2. Control/alarm outputs.




Fig. 3. Supply.




Fig. 4. Interface RS-485



Fig. 5. Transducer supply.



Fig. 6. Binary input.




Fig. 7. Additional input.



Fig. 8. Current transformer input.

Ordering

RE72 -	X	X	X	X	X	X	X
Output 1:							
relay	1						
voltage: 0/5 V	2						
continuous current: 0/4 .. 20 mA	3						
continuous voltage: 0 .. 10 V	4						
Output 2:							
relay ¹⁾	1						
voltage: 0/5 V	2						
continuous current: 0/4 .. 20 mA	3						
continuous voltage: 0 .. 10 V	4						
Options:							
none						0	
output 3 - relay						1	
binary input						2	
current transformer input ²⁾						3	
additional current input: 0/4 .. 20 mA						4	
transducer supply: 24 V d.c. 1 W						5	
Supply:							
85 .. 253 V a.c./ d.c.						1	
20 .. 40 V a.c./ d.c.						2	
Version:							
standard						00	
custom-made ³⁾						XX	
Language version:							
Polish						P	
English						E	
other ³⁾						X	
Acceptance tests:							
without extra quality requirements						8	
with an extra quality inspection certificate						7	
according to customer's request ³⁾						X	

- 1) - only, when a relay is also selected on the output 1
 2) - only, when a relay or voltage output 0/5 V is also selected
 3) - only, after agreeing with the manufacturer

Ordering example:

The code: **RE72 - 1 2 2 1 00 E 8** means:

RE72 - temperature controller of RE72 type

1 - output 1: relay

2 - output 2: voltage 0/5 V

2 - option with binary input

1 - supply: 85 .. 253 V a.c./ d.c.

00 - standard version


E - documentation and descriptions in English version

8 - without extra quality requirements.

See Also



Temperature sensors.



For more information about SIFAM's products please visit our website www.sifamtinsley.com/uk

Sifam Tinsley Instrumentation Ltd
 Unit 1 Warner Drive,
 Springwood Industrial Estate
 Braintree, Essex, UK, CM72YW
 E-mail: sales@sifamtinsley.com
 Web: www.sifamtinsley.com/uk
 Contact: +44(0)1803615139



Sifam Tinsley Instrumentation Inc.
 3105, Creekside Village Drive,
 Suite No. 801, Kennesaw,
 Georgia 30144 (USA)
 E-mail: psk@sifamtinsley.com
 Web: www.sifamtinsley.com
 Contact No.: +1 404 736 4903