

ATP/ATPR-FL SERIES

AC Current Transducers

ATP/ATPR-FL Series AC-Current Transducers are large-format solid-core transducers designed for high current applications from 200 A to 2000 A. Powered by 120 VAC or 24 VAC/DC, the ATP/ATPR-FL Series takes advantage of available power supplies and eliminates the need for costly control power transformers. Options include average responding and True RMS versions, 0–5/10 VDC or 4–20 mA analog outputs and switch-selectable input ranges.

AC Current Transducer Applications

Commercial and Industrial MCC's

- Fits conveniently in motor control centers, senses current on industrial motors and provides analog inputs back to PLC or controller.

VFD or SCR Controlled Loads, Electronic Ballasts

- Helpful in monitoring VFD-controlled motors to provide operational status. Provides accurate measurement of ballast input power and phase angle fired SCRs.

Large Pumping Applications

- Ideal for proof-of-flow in water/wastewater, boiler and other industrial pumping applications 150 HP and over. 120 VAC/DC or 24 VAC/DC supply options allow for powering off of readily available supply, eliminating need for CPTs.

Power Distribution Centers (PDCs)

- Monitors current output on commercial generation equipment and serves as a current input for use in power consumption calculations.



AC Current Transducer Features

Large Aperture

- Accommodates large conductors or wire bundles.

Select the Right Output

- True RMS technology is accurate on distorted waveforms like those associated with VFD or SCR outputs.
- Average Responding for use with linear, sinusoidal waveforms.

Jumper-selectable Ranges

- Reduces inventory.
- Eliminates zero and span pots.


Isolation

- Output is magnetically isolated from the input for safety.
- Eliminates insertion loss (voltage drop).

Designed for UL/cUL, CE Approval

- Accepted worldwide.

Centrifugal Pump Monitoring

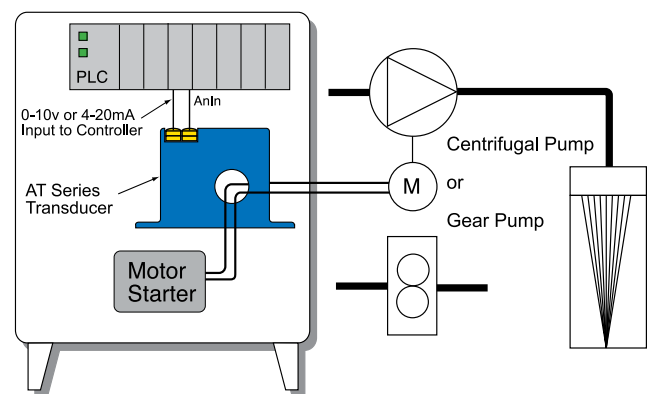

OEMs


Test & Evaluation Units for OEMs

Free program expedites evaluation process. See page 3 for details.


- For additional Application Examples, go to www.nktechnologies.com/applications

AC Current Transducer Dimensions

FL Case

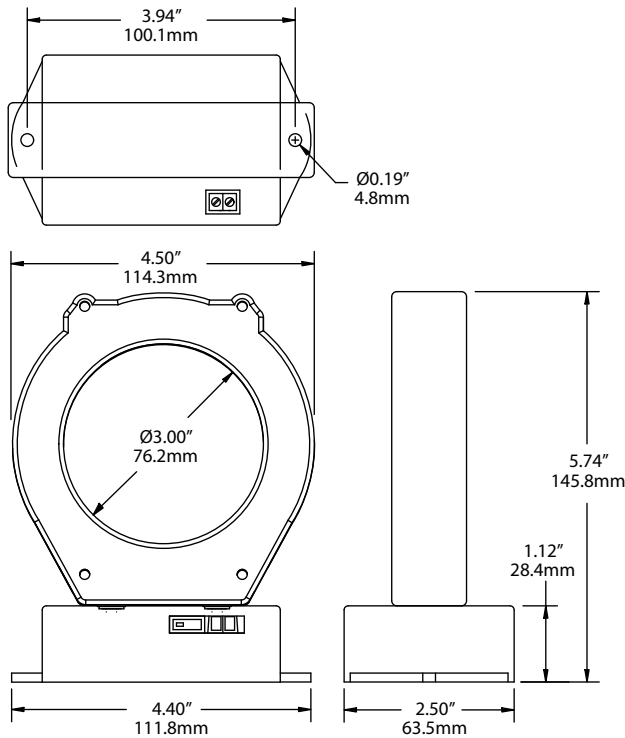

AC Current Transducer Connections

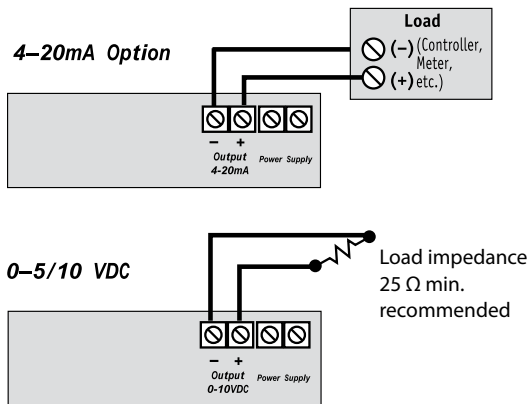

Notes:
Terminals are deadfront captive screw terminals.
Use 12-22 AWG solid or stranded.

AC Current Transducer Specifications

Power Supply	• 120 VAC/DC (108-132 V) • 24 VAC/DC (22-26 V)
Power Consumption	<2 VA
Output Signal	• -005 Model: 0-5 VDC • -010 Model: 0-10 VDC • -420 Model: 4-20 mA
Output Limit	• -005 Model: 112% (5.6 V) • -010 Model: 112% (11.2 V) • -420 Model: 112% (22.4 mA)
Output Impedance	25 KΩ min.: VDC models 500 Ω max.: 4-20 mA models
Accuracy	1.0% FS
Response Time	• ATP: 100 ms (10-90% step change) • ATPR: 600 ms (10-90% step change)
Frequency Range	• ATP: 40-100 Hz, sinusoidal • ATPR: 10-400 Hz
Isolation Voltage	UL listed to 600 VAC, tested to 5 KV
Input Range (switch-selectable)	• ATP3/ATPR3: 0-375 A/500 A/750 A • ATP4/ATPR4: 0-1000 A/1333 A/2000 A
Case	UL94 V-0 Flammability Rated
Environmental	-4 to 122°F (-20 to 50°C) 0-95% RH, non-condensing
Listings	Designed for UL/cUL and CE approval

AC Current Transducer Ordering Information

Sample Model Number: ATPR-3-420-120-FL

True RMS AC current transducer, 120 VAC/DC, powered with a 4-20 mA output, 375/500/750 A ranges in a solid-core case.

ATP (1) - (2) - (3) - (4) - (5) F L

(1) Measurement

R	True RMS
	Average Responding (blank)

(2) Full Scale Range

3	375, 500, 750 A
4	1000, 1333, 2000 A

(3) Output Signal

005	0-5 VDC
010	0-10 VDC
420	4-20 mA

(4) Power Supply

24U	24 VAC/DC
120	120 VAC/DC

(5) Case Style

FL	Solid-core
----	------------