

402SS ALL STAINLESS LIQUID FILLED GAUGES

CPW



Features:

DIAL SIZE: 4"
CASE: 304 STAINLESS STEEL
RING: 304SS *CRIMPED*
MOVEMENT: STAINLESS STEEL
ELEMENT: 316 STAINLESS STEEL
SOCKET: 316 STAINLESS STEEL
WINDOW: MOLDED POLYMER
CONNECTION: 1/2" MNPT STANDARD
ACCURACY: 1% FULL SCALE

DUAL-SCALE STANDARD



NON-REPAIRABLE

THE 402SS SERIES IS REPAIRABLE

DUAL SCALE RANGES AS SHOWN BELOW

PSI SCALE	30	60	100	160	200	300	400	600	1000	1500	2000	3000	5000	6000	10,000
KPa SCALE	200	400	700	1100	1400	2100	2800	4000	7000	10,000	14,000	21,000	35,000	40,000	70,000


CPW Valve & Instrument Ltd.

#100, 7503 Girard Rd. Edmonton, Alberta, Canada T6B 2H2

PH: 780-451-6888 FAX: 780-451-6878 EMAIL: cpwvalve@planet.eon.net

www.cpwvalve.com

402SS ALL STAINLESS

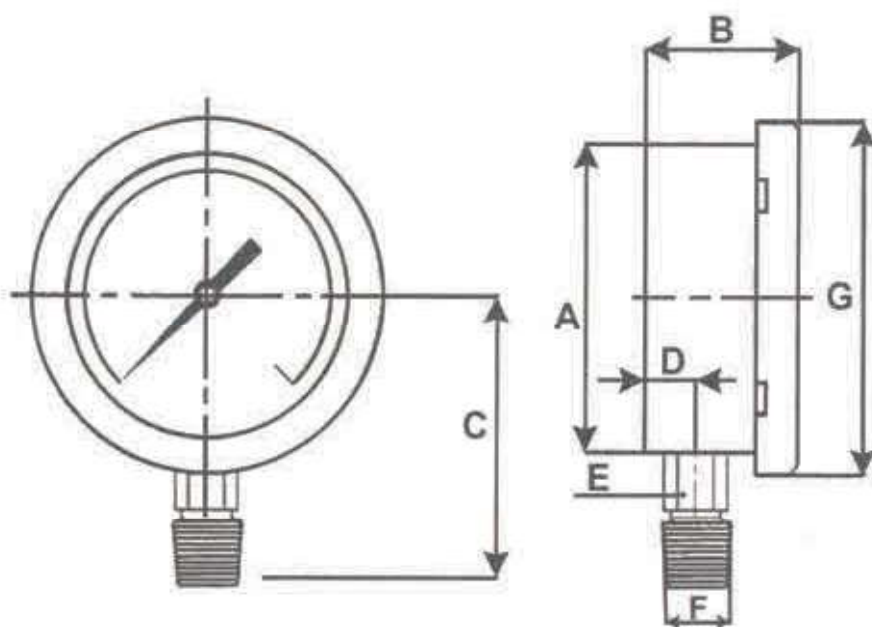

	A	B	C	D	E	F	G
mm.	103	50	90	15.5	22	12.7	118
cm.	10.3	5	9	1.55	2.2	1.27	11.8
in.	4 1/16	2	3 9/16	5/8	7/8	1/2	4 5/8