


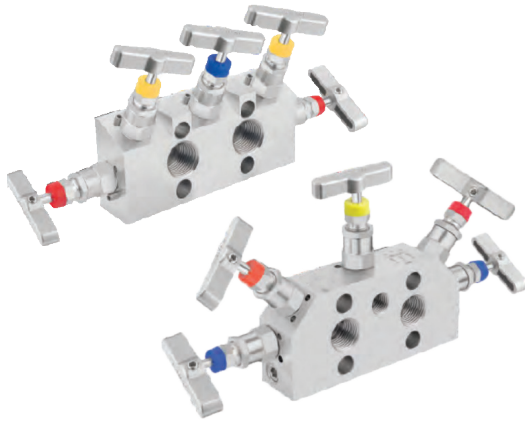

Description & Features:


- Compact, wafer design for direct mounting
- Rugged and designed for use with differential pressure transmitters and impulse lines
- 5-handle - 2 isolation valves, 1 equalizing valve and 2 vent valves
- Straight and angled pattern to suit all installation requirements
- Many variants of construction available to handle all media requirements
- Soft and Hard seat options; 6,000 psi and 10,000 psi pressure rated
- PTFE packing standard with Graphoil optional
- CRN available upon request
- 5 year warranty

Applications:


- Designed to be perfectly installed with Winters LY36 Series (with M10x45 bolts) and other differential transmitters
- Manifolds are critical in process and industrial environments for the enabling of shut-downs for the testing, repair and upgrading of instruments

Pressure vs Temperature Graph

Manifolds 10000 (689 bar) Material SS 316

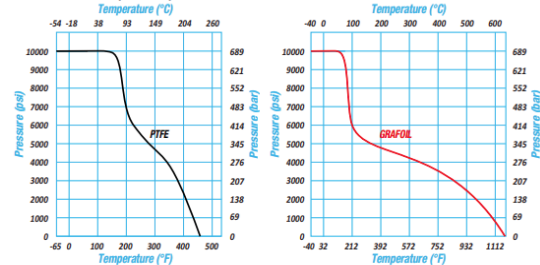


Manifolds 6000 psi (414 bar) Material SS 316

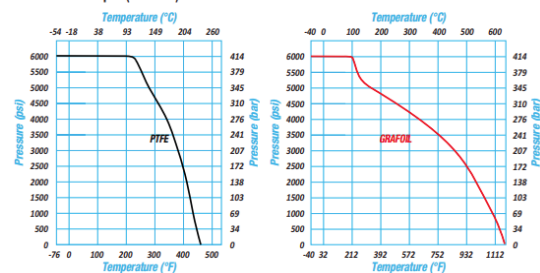

Material

S.NO.	Description	Material
14	Non-rotating Vee tip	630SS
13	Washer	316SS
12	Dust Cap	Plastic Lid
11	Lock Pin	316SS
10	Handle	316SS
9	Grub Screw	Steel
8	Lock Nut	316SS
7	Spindle	316SS
6	Packing Washer	316SS
5	Packing	PTFE
4	Washer	316SS
3	Gland Retainer	316SS
2	Bonnet	316SS
1	Body	316SS

Flow Pattern



5-handle - 2 isolation valves, 1 equalizing valve and 2 vent valves

Order Codes

*Other material variants available upon request, including Stainless Steel NACE for Sour Gas and Monel

Connection	Handles	Material	Seat	Packing Material	Pressure Rating	Code
Direct Mount x 1/2" NPT Female	Straight	Stainless Steel	Soft	PTFE	6,000 psi	MVA5SS2D
Direct Mount x 1/2" NPT Female		Stainless Steel	Hard	PTFE	10,000 psi	MVA5SH2D
Direct Mount x 1/2" NPT Female		Stainless Steel	Soft	Graphoil	6,000 psi	MVA5SS2DG
Direct Mount x 1/2" NPT Female		Stainless Steel	Hard	Graphoil	10,000 psi	MVA5SH2DG
Direct Mount x 1/2" NPT Female	Angled	Stainless Steel	Soft	PTFE	6,000 psi	MVA5ASS2D
Direct Mount x 1/2" NPT Female		Stainless Steel	Hard	PTFE	10,000 psi	MVA5ASH2D
Direct Mount x 1/2" NPT Female		Stainless Steel	Soft	Graphoil	6,000 psi	MVA5ASS2DG
1/2" NPT Female		Stainless Steel	Hard	Graphoil	10,000 psi	MVA5ASH2DG

Option suffix: N = NACE Compliant

Dimensions (mm)

