


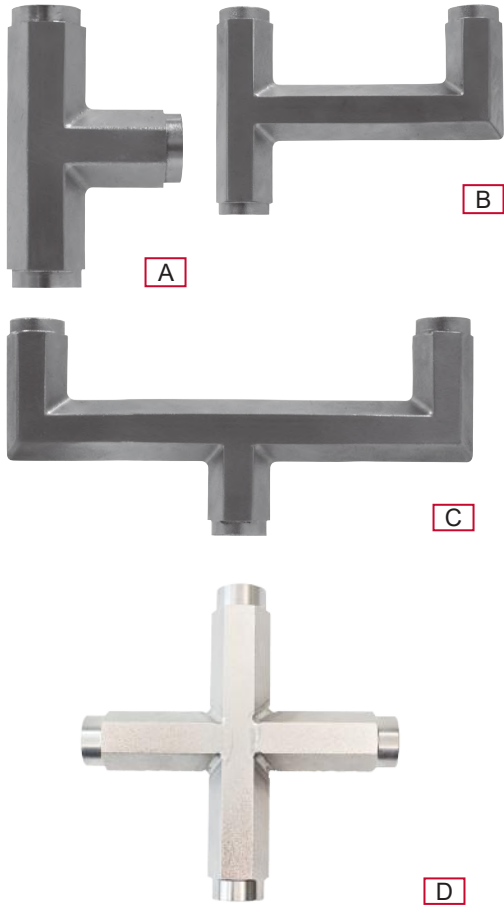

Description & Features:

- Robust tees for isolation ring assembly
- 1-piece fully-welded construction
- 316 SS construction with 1/4" or 1/2" NPTF connections
- Ideal for installing pressure gauges, switches and transmitters for full functionality

Applications:

- Water treatment facilities and other slurry environments where isolation rings are installed and more than one pressure instrument is required (eg. pressure gauge with pressure switch and/or transmitter)


Order Codes

Type	1/4"	1/2"
A	FIR0014	FIR0010
B	FIR0024	FIR0020
C	FIR0034	FIR0030
D	FIR0044	FIR0040


Specifications

Material	316 SS
Connections	2 or 3 instrument connections, 1 process connection
Instrument Connections	1/4" or 1/2" NPTF
Process Connection	1/2" NPTF


Type A



Type B

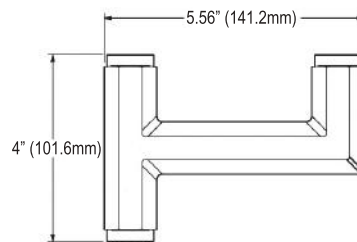

Type C

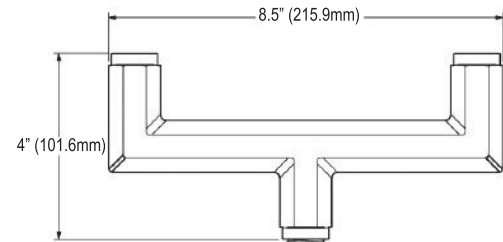

Type D

