

HYDRO-POISE STAINLESS STEEL LIQUID FILLED 6" GAUGES

CPW 602



Features:

- SIZE: 6"
- CASE: 304 STAINLESS STEEL
- RING: POLISHED 304SS - BAYONET LOCK
- MOVEMENT: STAINLESS STEEL
- ELEMENT: 316 STAINLESS STEEL
- SOCKET: 316 STAINLESS STEEL
- WINDOW: ACRYLIC
- CONNECTION: 1/2" MNPT STANDARD,
1/4" MNPT AVAILABLE
- 1% ACCURACY: 1% FULL SCALE
- DUAL-SCALE STANDARD**
- CUSTOM DIALS AVAILABLE ON REQUEST
- SHOWN WITH CUSTOM DIAL, NOMINAL CHARGE WOULD APPLY

THE 602 SERIES IS REPAIRABLE

**ALL OF THE HYDRO-POISE UNIQUE FEATURES NOW IN AN
EASY-TO-READ 6" STAINLESS STEEL CASE - MADE IN ALBERTA.
PRESSURE RANGES AVAILABLE**

Standard Dials - kPa

Total Gradation	-100 Vac	0-100	200	400	700	1100	1400	2100	2800	4000	7000	0-10,000	0-14,000	0-21,000	0-28,000	0-35,000	0-70,000
Figure Intervals	10	10	20	50	100	100	100	200	200	500	1,000	1,000	1,000	2,000	2,000	5,000	5,000
Graduating Marks	2	2	2	5	10	10	20	20	25	50	100	100	200	200	250	500	1,000

Compound Dials - kPa

Total Gradation	100 - 0 - 100	100 - 0 - 200	100 - 0 - 400	100 - 0 - 700	100 - 0 - 1000	100 - 0 - 1400	100 - 0 - 2100	
Figure Intervals	20 - 20	20 - 20	25 - 100	50 - 100	50 - 100	50 - 200	100 - 200	
Graduating Marks	5 - 5	5 - 5	5 - 10	10 - 10	20 - 10	25 - 20	25 - 25	

Standard Dials - PSI


Total Gradation	30" Vac	15	30	60	100	160	200	300	400	600	1,000	1,500	2,000	3,000	5,000	10,000
Figure Intervals	2	1	5	5	10	20	20	50	50	100	100	300	200	500	500	1,000
Graduating Marks	1/2	1/4	1/5	1/2	1	2	2	5	5	10	10	20	20	20	50	100

Compound Dials - PSI

Total Gradation	30" - 0 - 15 psi	30" - 0 - 30 psi	30" - 0 - 60 psi	30" - 0 - 100 psi	30" - 0 - 150 psi	30" - 0 - 200 psi	30" - 0 - 300 psi
Figure Intervals	5" 3	10" 5	10" 10	10" 10	30" 20	30" 20	30" 25
Graduating Marks	1" 1	1" .5	1" 1	2" 1	5" 2	5" 2	5" 5

* Also Available in 15,000 psi

CASE DIMENSIONS FOR 602 - 6" ALL STAINLESS

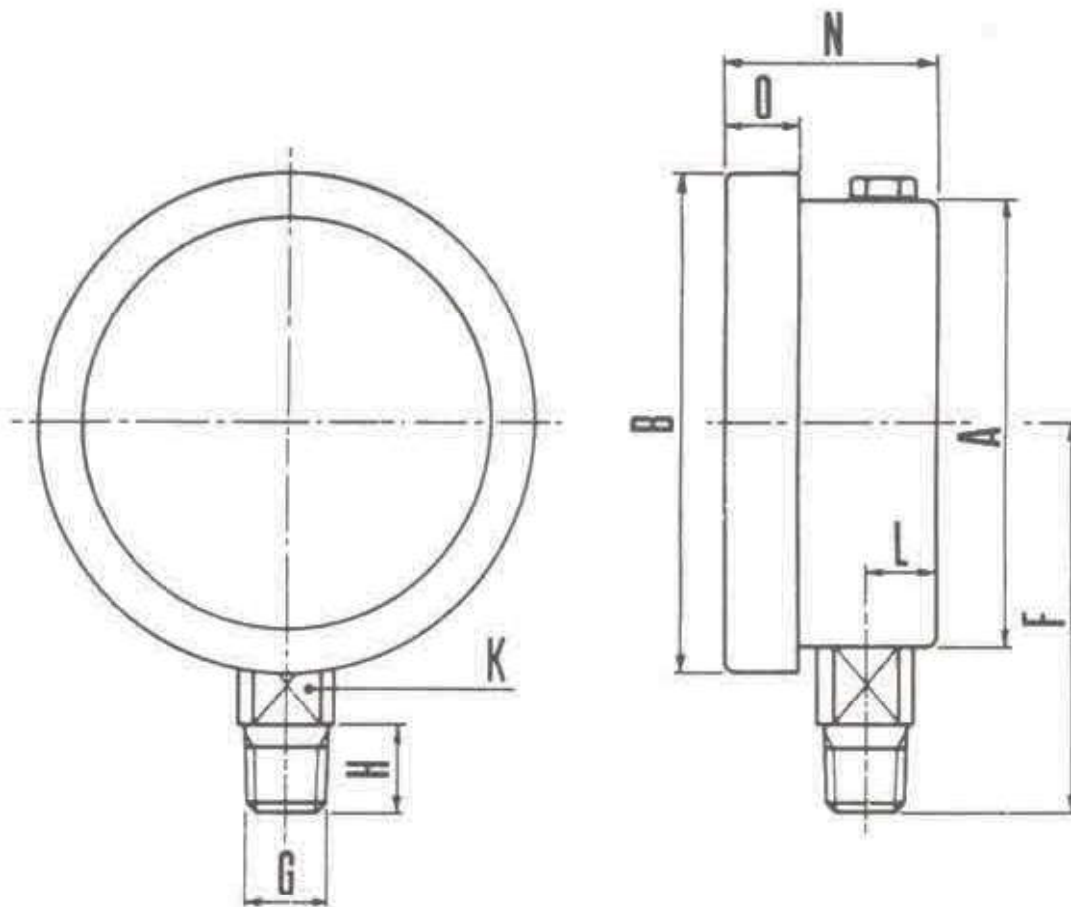

A	B	F	G	H	K	L	N	O
15.0 cm 5 ⁷ / ₁₆ "	16.6 cm 6 ⁷ / ₁₆ "	11.8 cm 4 ⁵ / ₁₆ "	12.7 cm 1/2" NPT	2.2 cm 1/8"	2.2 cm 1/8"	15.7 cm 5/8"	5.0 cm 2.0"	1.5 cm 1/4"